

# Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

## Commercial long steel hot-rolled manufactured from steel scrap



THE INTERNATIONAL EPD® SYSTEM



LATIN AMERICA

INTERNATIONAL EPD SYSTEM

### Programme:

The International EPD® System,  
[www.environdec.com](http://www.environdec.com)

### Programme Operator:

EPD® International AB

EPD registered through: EPD® Latin America

### EPD registration number:

EPD-IES-0001663:001 (S-P-01663)

### Registration date:

2020-07-29

### Version date (version 001):

2025-06-16

### Validity date:

2030-06-16

*"An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see [www.environdec.com](http://www.environdec.com)."*

***This EPD is of the type "EPD of multiple products, based on the average results of the product group"***

***This EPD covers the following products: Profiles CE, Hexagon, Angles LI, Square Bars, Rounds Bars and Flats Bars.***

ECO PLATFORM

**EPD**  
VERIFIED



# EPD Content



THE INTERNATIONAL EPD® SYSTEM

1. Programme information 3

2. Company information 4

3. Product information 5

4. LCA information 7

5. Content declaration 12

6. Results of the environmental performance indicators 13

7. Additional environmental information 18

8. Version history 18

9. Contact information 19

10. References 19

# 1. Programme information



|            |                                                                        |
|------------|------------------------------------------------------------------------|
| Programme: | The International EPD® System                                          |
| Address:   | EPD International AB,<br>Box 210 60,<br>SE-100 31 Stockholm,<br>Sweden |
| Website:   | <a href="http://www.environdec.com">www.environdec.com</a>             |
| E-mail:    | <a href="mailto:info@environdec.com">info@environdec.com</a>           |

Product Category Rules (PCR)

CEN standard EN 15804:2012+A2:2019/AC:2021 serve as the core Product Category Rules (PCR)

Product category rules (PCR): 2019:14 Construction products. Version 1.3.4 published April 30th, 2024,UN CPC 4124 Bars and rods, hot rolled, of iron or steel.

PCR review was conducted by: The Technical Committee of the International EPD System. See [www.environdec.com](http://www.environdec.com) for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat [www.environdec.com/contact](http://www.environdec.com/contact).

Life Cycle Assessment (LCA)

Elena Dominguez, Mireya González, Dulce Zaragoza (2025), Life Cycle Assessment of Commercial steel profiles- CE, Hexagon, Angles LI, Square Bars, Rounds Bars and Flats Bars mabufactured from scrap by Gerdau Corsa,Center for Life Cycle Assessment and Sustainable Design – CADIS.

Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

☒ EPD verification by individual verifier

Third-party verifier: Itxaso Trabudua, IK Ingeniería SL.

Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third party verifier:

☐Yes ☒No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison.



# 2. Company information

|                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Owner of the EPD:                                            | GERDAU CORSA S.A.P.I. DE C.V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Contact:                                                     | Rigoberto Torres Villeda (Market Development Advisor)<br>rigoberto.torres@gerdau.com<br>Tel:5544010036                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Description of the organisation:                             | Gerdau Corsa is a leader in the production of long steel in the Americas and one of the main suppliers of special long steel in the world. It is the largest recycler in Latin America and annually transforms millions of tons of scrap into steel. Gerdau has a technical team focused on understanding and meeting customer needs, providing solutions for every requirement. In addition to delivering high-quality steel products, offer value-added services such as custom-length cuts to optimize the fabrication of steel structures for buildings and industrial applications. Our extensive network of steel mills spans the United States, Argentina, Peru, Uruguay, Brazil, Canada, and Mexico |
| Product-related or management system-related certifications: | ISO 9001:2015, 14001:2015 and 45001:2018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Name and location of product site:                           | Manufacturing plant: Avenida de La Presa No. 2, Fraccionamiento Industrial La Presa, Tlalnepantla de Baz Municipality, State of Mexico, ZIP Code 54187, Mexico.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## GERDAU CORSA

Gerdau's history began in 1901 with a factory in Porto Alegre, Brazil. Today, Gerdau products are present in the daily lives of millions of people.

Gerdau arrived in Mexico in March 2007 with the acquisition of the Tultitlan steel plant (Sidertul). In 2008, Gerdau created a commercial alliance with the Aceros Corsa commercial bar plant and in 2012, Gerdau and Aceros Corsa unified the brand in Mexico under the name Gerdau Corsa. In 2015, Gerdau Corsa starts operations at Planta Sahagun, a structural profiles plant located in Ciudad Sahagun, in the state of Hidalgo.

At Gerdau Corsa, we believe in the transformative power of steel, and since the beginning of our history, the main objective has been to transform the lives of the people around us. Steel can turn projects into reality and drive the development of a better society and a better place to live.





# 3. Product information



|                         |                                                                                                                                                                 |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product name:           | Commercial long steel hot-rolled manufactured from steel scrap                                                                                                  |
| Product identification: | Profiles CE, Hexagon, Angles LI, Square Bars, Rounds Bars and Flats Bars                                                                                        |
| Product description:    | Commercial long steel profiles of different shapes and sizes (angles, squares, etc.) provide quality and aesthetic finishes for buildings and other structures. |
| UN CPC code:            | UN CPC 4124 Barsand rods, hot rolled, of iron or steel                                                                                                          |
| Geographical scope:     | Mexico                                                                                                                                                          |


This EPD includes several products from the Commercial steel profiles: Profile CE, Angles LI, Square Bars, Rounds Bars OS, Flats bars and Hexagon. The results of this EPD reflect the average results of all products, so this EPD is valid for multiple products based on weighted average results, the option chosen for declaring multiple products, under PCR 2019:14 Construction Products. Version 1.3.4.

Commercial steel profiles are manufactured by Gerdau Corsa from scrap at the La Presa plant located in the Estado de Mexico, and the products are mainly used in the civil construction, industrial, agricultural and automotive sectors. The following is a description of the different commercial profiles manufactured and their technical specifications.

## 3.1 Profile CE

Commercial CE profiles are characterized by a cant greater than or equal to 3 inches. They are very effective in creating stable structures.

| Technical characteristics                                                                                                                                                                                                                                                | Application                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Hot-Rolled ASTM A6</li><li>Under the ASTM A529 G50</li><li>Under the ASTM A36</li><li>Under the ASTM A572 G50</li><li>On request they can be manufactured according to other standards</li><li>Section depth: 3",4" y 6"</li></ul> | <ul style="list-style-type: none"><li>In robust and resistant metal structures</li><li>Racks</li><li>Blacksmithing</li><li>Secondary elements on decks</li><li>Conveyor belts</li></ul> |

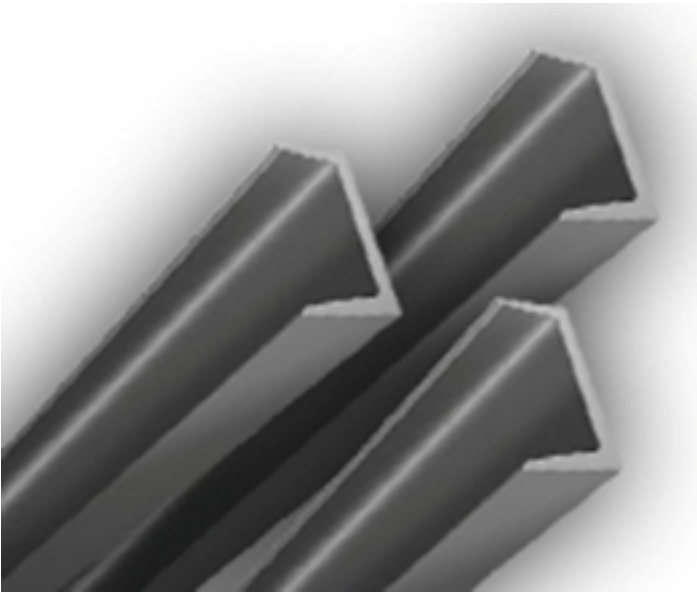

## 3.2 Profile Angles LI

LI Angles have a wide range of uses from ironwork to telecommunication towers.

| Technical characteristics                                                                                                                                                                                                                                                                   | Application                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Hot-Rolled ASTM A6</li><li>Under the ASTM A-529 G50 standard</li><li>Under the ASTM A36</li><li>Under the ASTM A572 G50 and G65</li><li>On request they can be manufactured according to other standards</li><li>Section depth: 1 1/4" - 4"</li></ul> | <ul style="list-style-type: none"><li>Supports and armours</li><li>Frames and ironworks</li><li>Telecommunications and electrical towers</li><li>Mechanical industry</li><li>Farming implements</li><li>Metal structures (joist beams)</li></ul> |



# 3. Product information



### 3.3 Square Bars

The square profile is a solid steel bar with equal sides and belongs to the family of commercial profiles. If it is given a twisted finish, it is known as Caramel Square.


| Technical characteristics                                                                                                                                                                                                                                                                                                                                                                               | Application                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Hot-Rolled under ASTM A6</li><li>Under the ASTM A-36 standard</li><li>On request SAE 1045 and 1060 standard</li><li>On request SAE carbon steels</li><li>On request they can be manufactured according to other standards</li><li>Minimum section depth: 12 mm</li><li>Maximum section depth: 2 1/4"</li><li>Caramel Square: ASTM A36. 1/2", 12mm, 5/8"</li></ul> | <ul style="list-style-type: none"><li>Anchorage</li><li>Ironworks</li><li>Mechanical industry</li><li>Agricultural implements</li></ul> |



### 3.4 Rounds Bars OS

Rounds Bars belong to the family of Commercial Profiles. They are also known as Smooth Round.


| Technical characteristics                                                                                                                                                                                                                                                                                                                                                                        | Application                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Hot-Rolled ASTM A6</li><li>Under the ASTM A36</li><li>Under the ASTM A529 GR 50 and G50</li><li>On request SAE 1045, 1018, 1010, 1042 and 1060 standard</li><li>On request SAE Carbon steels</li><li>On request they can be manufactured according to other standards</li><li>Minimum section depth: 1/2"</li><li>Maximum section depth: 2 1/16"</li></ul> | <ul style="list-style-type: none"><li>Industrial applications</li><li>Blacksmiths</li><li>Forging</li><li>Steel anchors</li></ul> |

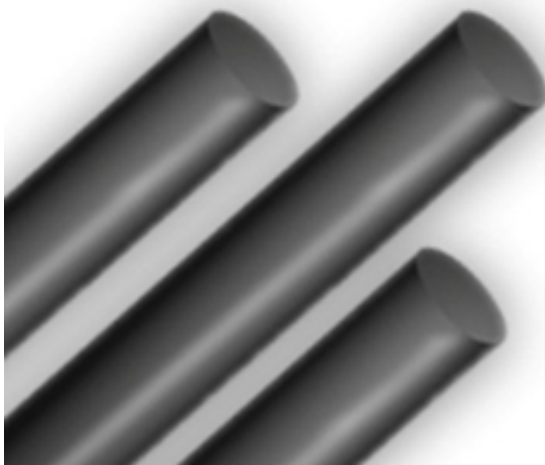

### 3.5 Flats bars

Flat bars are indispensable to obtain greater precision and modulation in steel structures.


| Technical characteristics                                                                                                                                                                                                                                                                                                                                                                             | Application                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Hot-Rolled ASTM A6</li><li>Under the ASTM A36</li><li>Under the ASTM A529 G50</li><li>Under the ASTM A572 G50 and G65</li><li>On request SAE 1045 and 1060 standard</li><li>On request SAE Carbon Steels</li><li>On request they can be manufactured according to other standards</li><li>Minimum section depth: 1"</li><li>Maximum section depth: 6"</li></ul> | <ul style="list-style-type: none"><li>Metal structures: bars, gates, squares, etc.</li><li>Tool manufacturing</li><li>Agricultural and road implements</li><li>Mechanical industry general</li></ul> |

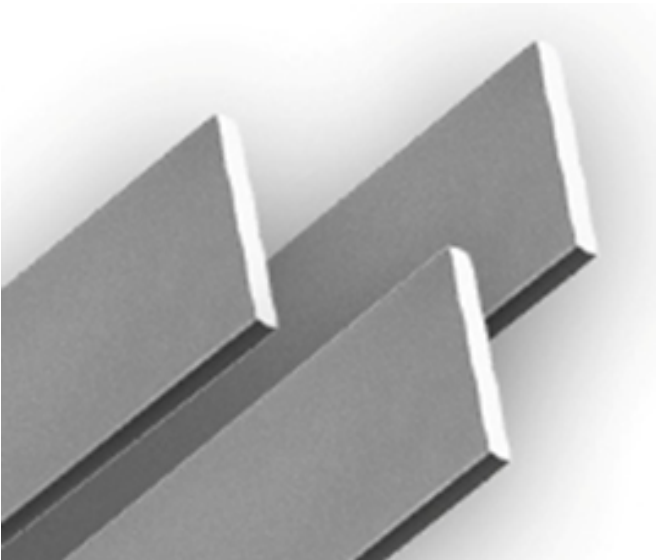

### 3.6 Profile Hexagon

It is a profile used for hand tools and for agricultural and industrial applications.

| Technical characteristics                                                                                                                                                                                                                                                         | Application                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Hot-Rolled ASTM A6</li><li>Under the ASTM A36</li><li>On request SAR 1045 standard</li><li>On request SAE Carbon Steels</li><li>On request, they can be manufactured according to other standards</li><li>Section depth: 3/4"- 1"</li></ul> | <ul style="list-style-type: none"><li>Hand tools, such as chisels and chisels</li></ul> |

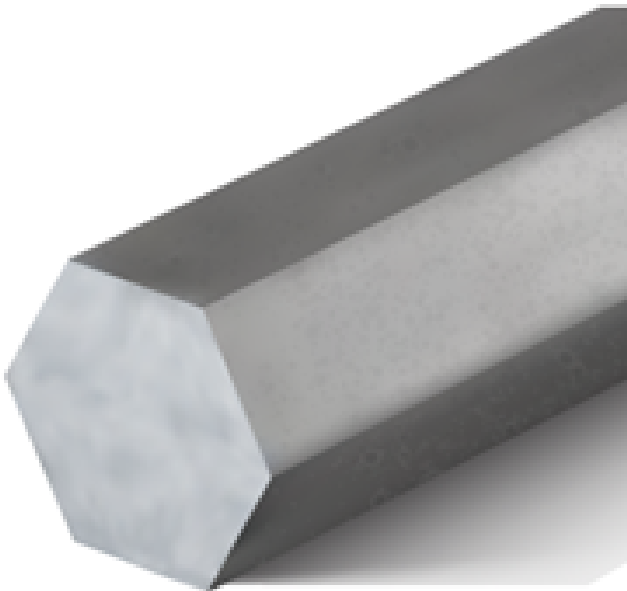

# 4. LCA information



Environmental potential impacts were calculated in accordance with EN 15804:2012+A2:2019/AC:2021 sustainability of construction works and PCR 2019:14 Construction products Version 1.3.4. This EPD is in accordance with ISO 14025:2006. Environmental potential impacts were calculated through Life Cycle Assessment (LCA) methodology conformity to ISO 14040:2006 and ISO 14044:2006. An external third-party verification process of the EPD was conducted according to General Programme Instructions from the International EPD® System Version 5.0.0. (General Programme Instructions for The International EPD System, 2024). Verification includes a documental review and a validation of both the underlying LCA study and documents describing additional environmental information that justify data provided in the EPD.

4.1. Declared unit

1000 kg of commercial long steel hot-rolled manufactured from steel scrap by Gerdau Corsa at the La Presa plant in Estado de Mexico.

4.2. Reference service life

No applicable

4.3. System boundary

The potential environmental impacts were calculated through Life Cycle Assessment (LCA) methodology for Commercial long steel hot-rolled manufactured from steel scrap according to ISO 14040:2006 and ISO 14044:2006. According to EN 15804:2012+A2:2019/AC:2021 section 5.2 the following type of EPD is “cradle to gate with modules C1-C4 and module D (A1-A3 +C+D). This EPD is based on information upstream processes and core processes, modules A1 to A3, and approximations of scenarios C1, C2, C3, C4, and D based on construction sector statistics in Mexico (see **Table 1**). Does not include A4-A5 Construction stage and B Usage stage.

Table 1.System boundary.

| Life cycle stage                               | Information about the modules contained in the stages | EPD                                            |                                                                  |                                   |                                                                                   |
|------------------------------------------------|-------------------------------------------------------|------------------------------------------------|------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------|
|                                                |                                                       | Cradle-to-gate with modules C1-C4 and module D | Cradle-to-gate with modules C1-C4, module D and optional modules | From cradle to grave and module D | EPD construction services: Cradle to door with modules A1-A5 and optional modules |
| A1-A3 products stage                           | A1) Raw material procurement                          | Mandatory                                      | Mandatory                                                        | Mandatory                         | Mandatory                                                                         |
|                                                | A2) Transport                                         |                                                |                                                                  |                                   |                                                                                   |
|                                                | A3) Manufacture                                       |                                                |                                                                  |                                   |                                                                                   |
| A4-A5 Construction stage                       | A4) Transport                                         | -                                              | Optional for goods<br>Required for services                      | Mandatory                         | Mandatory                                                                         |
|                                                | A5) Construction / installation                       |                                                |                                                                  |                                   |                                                                                   |
|                                                | B1) Use                                               |                                                |                                                                  |                                   |                                                                                   |
|                                                | B2) Maintenance                                       |                                                |                                                                  |                                   |                                                                                   |
|                                                | B3) Reparation                                        |                                                |                                                                  |                                   |                                                                                   |
|                                                | B4) Replacement                                       |                                                |                                                                  |                                   |                                                                                   |
|                                                | B5) Remodeling                                        |                                                |                                                                  |                                   |                                                                                   |
| B Usage stage                                  | B6) Operational energy use                            | -                                              | Optional                                                         | Mandatory                         | Mandatory                                                                         |
|                                                | B7) Operational water use                             |                                                |                                                                  |                                   |                                                                                   |
|                                                |                                                       |                                                |                                                                  |                                   |                                                                                   |
|                                                |                                                       |                                                |                                                                  |                                   |                                                                                   |
|                                                |                                                       |                                                |                                                                  |                                   |                                                                                   |
| C End of life stage                            | C1) Deconstruction, demolition                        | Mandatory                                      | Mandatory                                                        | Mandatory                         | Optional                                                                          |
|                                                | C2) Transport                                         |                                                |                                                                  |                                   |                                                                                   |
|                                                | C3) Waste processing                                  |                                                |                                                                  |                                   |                                                                                   |
|                                                | C4) Final disposition                                 |                                                |                                                                  |                                   |                                                                                   |
| D Benefits and charges beyond the system limit | D) Reuse, recycling or energy recovery potential      | Mandatory                                      | Mandatory                                                        | Mandatory                         | -                                                                                 |



# 4. LCA information



|                    | Product stage                              |           |               | Construction process phase |                       | Usage stage |             |        |             |                        |                          | End of life stage          |           |                  |          | Resource recovery stage                 |
|--------------------|--------------------------------------------|-----------|---------------|----------------------------|-----------------------|-------------|-------------|--------|-------------|------------------------|--------------------------|----------------------------|-----------|------------------|----------|-----------------------------------------|
|                    | Raw material supply                        | Transport | Manufacturing | Transport                  | Construction facility | Use         | Maintenance | Repair | Restoration | Operational energy use | Operational use of water | Demolition/ Deconstruction | Transport | Waste processing | Disposal | Reuse - Recovery - Recycling -potential |
| Module             | A1                                         | A2        | A3            | A4                         | A5                    | B1          | B2          | B4     | B5          | B6                     | B7                       | C1                         | C2        | C3               | C4       | D                                       |
| Declared modules   | X                                          | X         | X             | ND                         | ND                    | ND          | ND          | ND     | ND          | ND                     | ND                       | X                          | X         | X                | X        | X                                       |
| Geography          | MX<br>USA<br>CA<br>PER<br>CHN<br>IND<br>BR | MX        | MX            | ND                         | ND                    | ND          | ND          | ND     | ND          | ND                     | ND                       | MX                         | MX        | MX               | MX       | MX                                      |
| Specific data used | >90%                                       |           |               | -                          | -                     | -           | -           | -      | -           | -                      | -                        | -                          | -         | -                | -        | -                                       |
| Product variation  | 0%                                         |           |               | -                          | -                     | -           | -           | -      | -           | -                      | -                        | -                          | -         | -                | -        | -                                       |
| Site variation     | 0%                                         |           |               | -                          | -                     | -           | -           | -      | -           | -                      | -                        | -                          | -         | -                | -        | -                                       |

X = Declared module; ND = No declared module; NR = No reported; MX= Mexico, USA= United States of America, CA=Canada, PER=Peru, CHN=China, IND=Indian, BR=Brazil

Table 2.Description of the modules included in this EPD.



# 4. LCA information



## 4.4 Description of information modules

Description of information modules is included in **Table 3**.

| A1) Raw materials supply                                                                                                                                                                                                                                                                                                                                     | A2) Transportation                                                                                                                                                                                                                                                                                                  | A3) Manufacturing                                                                                                                                                                                                                                                                                                                                                                                           | C) End of life                                                                                                                                                                                                                                                                        | D) Benefits and charges beyond the system limit                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <ul style="list-style-type: none"><li>• Consumption and production of raw materials.</li><li>• Consumption and production of electrical energy.</li><li>• Consumption and production of natural gas and diesel.</li><li>• Packaging materials for raw materials.</li></ul> |  <ul style="list-style-type: none"><li>• Distance of transport of raw materials, auxiliary inputs and packaging to the manufacturing site.</li><li>• Fuel consumption and emissions related to transport requirements.</li></ul> |  <ul style="list-style-type: none"><li>• Consumption of auxiliary inputs.</li><li>• Water consumption and production.</li><li>• Packaging materials for auxiliary inputs and final product.</li><li>• Emissions to air and water.</li><li>• Waste generation.</li><li>• Transport distance for waste disposal.</li></ul> |  <ul style="list-style-type: none"><li>• Demolition.</li><li>• Transport final destination.</li><li>• What can be recycled.</li><li>• What goes to fill what is wasted and not recycled.</li></ul> |  <ul style="list-style-type: none"><li>• Avoided loads and benefits.</li></ul> |

Direct data obtained from Gerdau Corsa records correspond to the technology used in the Comercial profiles production process. Data collection was carried out directly from La Presa site. The Information is managed in an internal system and specialized software, consumption log, invoices with municipal systems and waste generation logs.

Table 3. Description of information modules included in this EPD.



# 4. LCA information



THE INTERNATIONAL EPD® SYSTEM

## 4.5 Description of the manufacturing process

**Product stage (modules A1, A2, A3).** This stage includes the acquisition of raw materials, transportation and the manufacturing process. It includes the processing of billet used as the main raw material, the procurement of other raw materials and their associated packaging. It also includes the generation of electrical energy and the production of fuel for the manufacturing process; also, the transportation of raw materials and auxiliary inputs to the manufacturing centers; in relation to the manufacturing process, it includes the production of auxiliary materials, the consumption of water, waste and emissions generated.

The **manufacturing process of Commercial long steel hot-rolled** is shown in Figure 1 and is described below: The process begins with the collection of scrap from different locations in the United States, Canada and Mexico. Part of the scrap is sent to Gerdau Corsa 's Tultitlan and Sahagun plants to manufacture billets, which are melted in an electric arc furnace and chemically adjusted. Once the billet is ready, a portion of the billet is sent to the La Presa plant, where it is loaded into the reheating furnace to raise its temperature to approximately 1,200°C. Once this temperature is reached, they are unloaded and passed to the rolling mills, where the material undergoes a roughing process consisting of six rolling mills and one trimming mill. At the exit of the castle, the rolled bar is cut by a shear, these sections are transferred and unloaded on the cooling table, where they undergo a plastic transformation consisting of a change of section and elongation, assuming the shape of the final product. On leaving the cooling table, they will be subjected to cold cutting, where a mechanical shear cuts the different products to commercial lengths.

**End of life stage (modules C1, C2, C3, C4).** These life cycle stages include fuel consumption for the demolition of 1000 kg of steel, transport of waste to recycling and sanitary landfill, processing of deconstruction waste for recycling and disposal of waste in sanitary landfill.

**Resource recovery stage (module D).** Avoided loads and benefits from stopping the production of virgin ore for steel.

## 4.6 Assumptions

Assumptions were made for each life cycle module, which are shown in the LCA report. This document presents the assumptions for the end-of-life module.

| Life Cycle Module | Assumptions                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| End of Life       | <ul style="list-style-type: none"> <li>• It is assumed that 98% of steel is recycled in Mexico (ALACERO, 2022).</li> <li>• It is assumed that 2% of waste is disposed of in landfills.</li> <li>• It is assumed that the transport distance of steel waste to the recycling site is 250.71 km.</li> <li>• Fuel consumption and emissions data are assumed for the dismantling and handling of steel.</li> </ul> |



Figure. 1. Flow diagram of Commercial long steel hot-rolled manufactured from steel scrap.



# 4. LCA information



### 4.7 Cut-off criteria

All flows of fuel, energy, materials and supplies necessary to produce the Commercial long steel hot-rolled manufactured from steel scrap have been considered; materials that could be used in preventive or corrective maintenance of machinery and equipment were disregarded, as well as the use of uniforms and personal protective equipment or other auxiliary materials, leaving out textiles impregnated with oils or plastics and the final disposal of these as hazardous waste.

### 4.8 Allocation

A physical allocation based on mass was applied to distribute the environmental burdens between the Commercial long steel hot-rolled and the co-products generated during the manufacturing stage. This choice is based on the high variability of market prices for co-products, which hinders a consistent economic allocation, as well as on the existence of a physical and causal relationship in their joint generation. Mass allocation, in accordance with section 4.3.4.2.2 of ISO 14044, allows for a more accurate representation of the environmental performance of the system under assessment, particularly when the co-products are not the main objective of the process.

In the evaluated product system, steel scrap is the raw material used in the production of billets (the raw material for commercial steel profiles), with post-consumer scrap accounting for over 90% of the total input. This information is based on primary data obtained directly from the operational records of Gerdau Corsa for the reference period.

The allocations made for billet manufactured at the Sahagun and Tultitlan plants, that supply billet to La Presa, will be considered. The allocation of materials is 86.03% for Sahagun (Table 4) and 91.91% for Tultitlán (Table 5), the remaining in each case corresponds to the generation of coproducts.

| Coproduct                  | Quantity | Unit | Assignment |
|----------------------------|----------|------|------------|
| Steel Slag                 | 156.32   | kg   | 13.45%     |
| Ferrous metal powder flake | 6.08     | kg   | 0.52%      |
| Billet                     | 1000     | Kg   | 86.03%     |
| Total                      | 1162.40  | Kg   | 100.00%    |

Table 4. Allocations for billets manufactured at the Sahagún plant.

| Coproduct     | Quantity | Unit | 5Assignment |
|---------------|----------|------|-------------|
| Dust of steel | 17.83    | kg   | 1.64%       |
| Steel Slag    | 70.16    | kg   | 6.45%       |
| Billet        | 1000     | kg   | 91.91       |
| Total         | 1087.98  | Kg   | 100.00%     |

Table 5. Allocations for billets manufactured at the Tultitlán plant.

During the information gathering process, Gerdau Corsa declared coproducts obtained during the manufacturing process of commercial profiles. Therefore, in the manufacture of the commercial profile, the allocation is made for 98.9% (Table 6), the remainder corresponds to the generation of coproducts.

| Coproduct          | Quantity | Unit | Assignment |
|--------------------|----------|------|------------|
| Shell              | 11.24    | kg   | 1.11%      |
| Oil                | 0.05     | kg   | 0.005%     |
| Commercial profile | 1000     | Kg   | 98.9%      |
| Total              | 1177.89  | kg   | 100%       |

Table 6 Allocation or the manufacturing process of the commercial profile.

The allocation of waste follows the Polluter Pays Principle, as established in the PCR. Waste is assigned to the system that generates it until it reaches the end-of-waste state. If this state is not met, all treatment impacts remain with the generating system.

### 4.9 Time and Geography

Direct data obtained from Gerdau Corsa is representative for 2023 for La Presa site, in Mexico.

### 4.10. Excluded lifecycle stages.

The modules: A4, A5, B1, B2, B3, B4, B5, B6, B7.



# 5. Content declaration



Commercial long steel hot-rolled manufactured from steel scrap is produced in electric arc furnacel.The typical composition is in **Table 7**.

Table 7. Content commercial long steel hot-rolled manufactured from steel scrap.

| Product components     | Weight, kg | Weight, % | Chemical substances         | Number CAS | Health class <sup>1</sup>     | Post-consumer recycled material, weight-% of product | Pre-consumer recycled material, weight-% of product | Biogenic content (kg) | Biogenic content (kg C/product) |
|------------------------|------------|-----------|-----------------------------|------------|-------------------------------|------------------------------------------------------|-----------------------------------------------------|-----------------------|---------------------------------|
| Steel scrap*           | 925.35     | 92.53     | Iron                        | 7439-89-6  | Not listed                    | 66%                                                  | 34%                                                 | 0.0                   | 0.0                             |
| Anthracite             | 0.87       | 0.09      | Anthracite                  | 8029-10-5  | Not listed                    | 0.0                                                  | 0.0                                                 | 0.0                   | 0.0                             |
| Dolomite               | 32.02      | 3.20      | Calcium carbonate           | 471-34-1   | Not listed                    | 0.0                                                  | 0.0                                                 | 0.0                   | 0.0                             |
| Hard Coal              | 21.16      | 2.12      | Coal                        | 7440-44-0  | Not listed                    | 0.0                                                  | 0.0                                                 | 0.0                   | 0.0                             |
| Calcitic lime          | 10.80      | 1.08      | Calcium carbonate           | 471-34-1   | Not listed                    | 0.0                                                  | 0.0                                                 | 0.0                   | 0.0                             |
| Ferrosilicon Manganese | 9.68       | 0.97      | Iron, Manganese and silicon | 11114-55-9 | Not listed                    | 0.0                                                  | 0.0                                                 | 0.0                   | 0.0                             |
| Others                 | 0.11       | 0.01      | -                           | -          | Not listed                    | 0.0                                                  | 0.0                                                 | 0.0                   | 0.0                             |
| Packaging materials    |            |           | Weight, kg                  |            | Weight-% (versus the product) |                                                      | Biogenic content (kg)                               |                       | Biogenic content (kg C/product) |
| Steel strapping        |            |           | 0.390                       |            | <1                            |                                                      | 0.0                                                 |                       | 0.0                             |

\*Steel manufactured in Gerdau Corsa uses 100% steel scrap as source of iron.  
1 According to EN15804 declaration of material content of the product shall List of Substances of Very High Concern (SVHC) that are listed by European Chemicals Agency.  
NOTE: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO<sub>2</sub>.

5.1 Distribution packaging

Steel strapping is used as packaging material.

5.2 Biogenig carbon information

The Commercial long steel hot-rolled manufactured from steel scrap doesn’t have biogenic carbon content. Biogenic carbon from packaging and products was excluded from the system, since by mass it represents less than 5% and have no biogenic carbon content (“2019:14 Construction products, Version 1.3.4”).

[1] European Chemical Agency (ECHA):  
a)Candidate List: [https://echa.europa.eu/es/candidate-list-table?p\\_p\\_id=disslists\\_WAR\\_disslistsportlet&p\\_p\\_lifecycle=1&p\\_p\\_state=normal&p\\_p\\_mode=view&p\\_p\\_col\\_id=column-1&p\\_p\\_col\\_pos=2&p\\_p\\_col\\_count=3&disslists\\_WAR\\_disslistsportlet\\_javax.portlet.action=searchDissLists](https://echa.europa.eu/es/candidate-list-table?p_p_id=disslists_WAR_disslistsportlet&p_p_lifecycle=1&p_p_state=normal&p_p_mode=view&p_p_col_id=column-1&p_p_col_pos=2&p_p_col_count=3&disslists_WAR_disslistsportlet_javax.portlet.action=searchDissLists)  
b)Authorisation list [https://echa.europa.eu/es/authorisation-list?p\\_p\\_id=disslists\\_WAR\\_disslistsportlet&p\\_p\\_lifecycle=1&p\\_p\\_state=normal&p\\_p\\_mode=view&p\\_p\\_col\\_id=column-1&p\\_p\\_col\\_pos=1&p\\_p\\_col\\_count=2&disslists\\_WAR\\_disslistsportlet\\_javax.portlet.action=searchDissLists](https://echa.europa.eu/es/authorisation-list?p_p_id=disslists_WAR_disslistsportlet&p_p_lifecycle=1&p_p_state=normal&p_p_mode=view&p_p_col_id=column-1&p_p_col_pos=1&p_p_col_count=2&disslists_WAR_disslistsportlet_javax.portlet.action=searchDissLists)  
Restriction list [https://echa.europa.eu/es/substances-restricted-under-reach?p\\_p\\_id=disslists\\_WAR\\_disslistsportlet&p\\_p\\_lifecycle=1&p\\_p\\_state=normal&p\\_p\\_mode=view&p\\_p\\_col\\_id=column-1&p\\_p\\_col\\_pos=1&p\\_p\\_col\\_count=2&disslists\\_WAR\\_disslistsportlet\\_javax.portlet.action=searchDissLists](https://echa.europa.eu/es/substances-restricted-under-reach?p_p_id=disslists_WAR_disslistsportlet&p_p_lifecycle=1&p_p_state=normal&p_p_mode=view&p_p_col_id=column-1&p_p_col_pos=1&p_p_col_count=2&disslists_WAR_disslistsportlet_javax.portlet.action=searchDissLists)



# 6. Results of the environmental performance indicators



The Life Cycle Impact Assessment was calculated using the EN 15804+A2 Method V1.02 / EF 3.1 normalization and weighting set (PRé-Sustainability, 2021) and Ecoinvent 3.10, implemented in the SimaPro 9.6.0.1 software.

Infrastructure and capital goods are not included, in accordance with PCR 2019:14 V.1.3.4.

## 6.1 Potential environmental impact

The electricity generation data in Mexico comes from the Ecoinvent 3.10 database and information from the National Center for Energy Control (CENACE), which is a decentralized public body whose purpose is to manage the Operational Control of the National Electric System in México. With both references a dataset was created, named “Electricity, high voltage, 2023 {MX}| market for electricity, high voltage | Cut-off, U”, this dataset represents the most recent electricity Mexican grid by type of technology.

| Type of technology                                         | Total |
|------------------------------------------------------------|-------|
| Deep geothermal                                            | 1%    |
| Hard coal                                                  | 4%    |
| Hydro, run-of-river                                        | 6%    |
| Natural gas, combined cycle power plant                    | 59%   |
| Natural gas, conventional power plant                      | 9%    |
| Nuclear, boiling water reactor                             | 3%    |
| Wind, 1-3MW turbine, onshore                               | 5%    |
| Photovoltaic, 570kWp open ground installation, multi-Si    | 5%    |
| Ethanol production from sweet sorghum                      | <0%   |
| Oil                                                        | 2%    |
| Natural gas, burned in gas turbine, for compressor station | 6%    |
| TOTAL                                                      | 100%  |

Table 8. Mexican electricity grid.

As part of the requirements of the PCR, the climate impact as kg CO<sub>2</sub> eq/kWh of the electricity used in the manufacturing process of commercial long steel hot-rolled, is reported in **Table 9**. This impact was calculated using the GWP-GHG indicator evaluated with IPCC GWP100 method.

| Electricity                                                                             | Quantity |
|-----------------------------------------------------------------------------------------|----------|
| Electricity, high voltage, 2023 {MX}  market for electricity, high voltage   Cut-off, U | 4.63E-01 |

Table 9. Electricity Global Warming Potential (kg CO<sub>2</sub> eq/kWh).

## Global warming potential (GWP-GHG) of Scrap use

Another specific topic in accordance with the requirements of the PCR is the report of the Global warming potential of the scrap inputs per 1000 kg of commercial long steel hot-rolled; this impact was calculated using the GWP-GHG indicator and it is reported in **Table 10**.

| Impact Basic Category                           | Unit                   | Quantity |
|-------------------------------------------------|------------------------|----------|
| Global warming potential (GWP-GHG) of scrap use | kg CO <sub>2</sub> eq. | 1.97E+01 |

Table 10. Scrap use, Global warming potential.

All information modules are reported separately. However, the total impact across all stages is also presented. Parameters describing environmental potential impacts were calculated using EN 15804+A2 Adapted version 1 ([https://eplca.jrc.ec.europa.eu/permalink/EN\\_15804.zip](https://eplca.jrc.ec.europa.eu/permalink/EN_15804.zip)) as implemented in SimaPro 9.6.0.1.



# 6. Results of the environmental performance indicators



Module A1) Raw materials have the highest potential impact with percentages above 72% in 12 of the 13 basic impact categories evaluated. Module A3) Manufacturing was in the second stage with the highest potential impact on the categories, with significant percentages of 13 to 24% in five impact categories. The lowest potential environmental contributions are generated in module A2) Transportation, where six categories showed significant percentages of 2% to 5% and one category, Depletion potential of the stratospheric ozone layer (ODP) accounted for 47%.

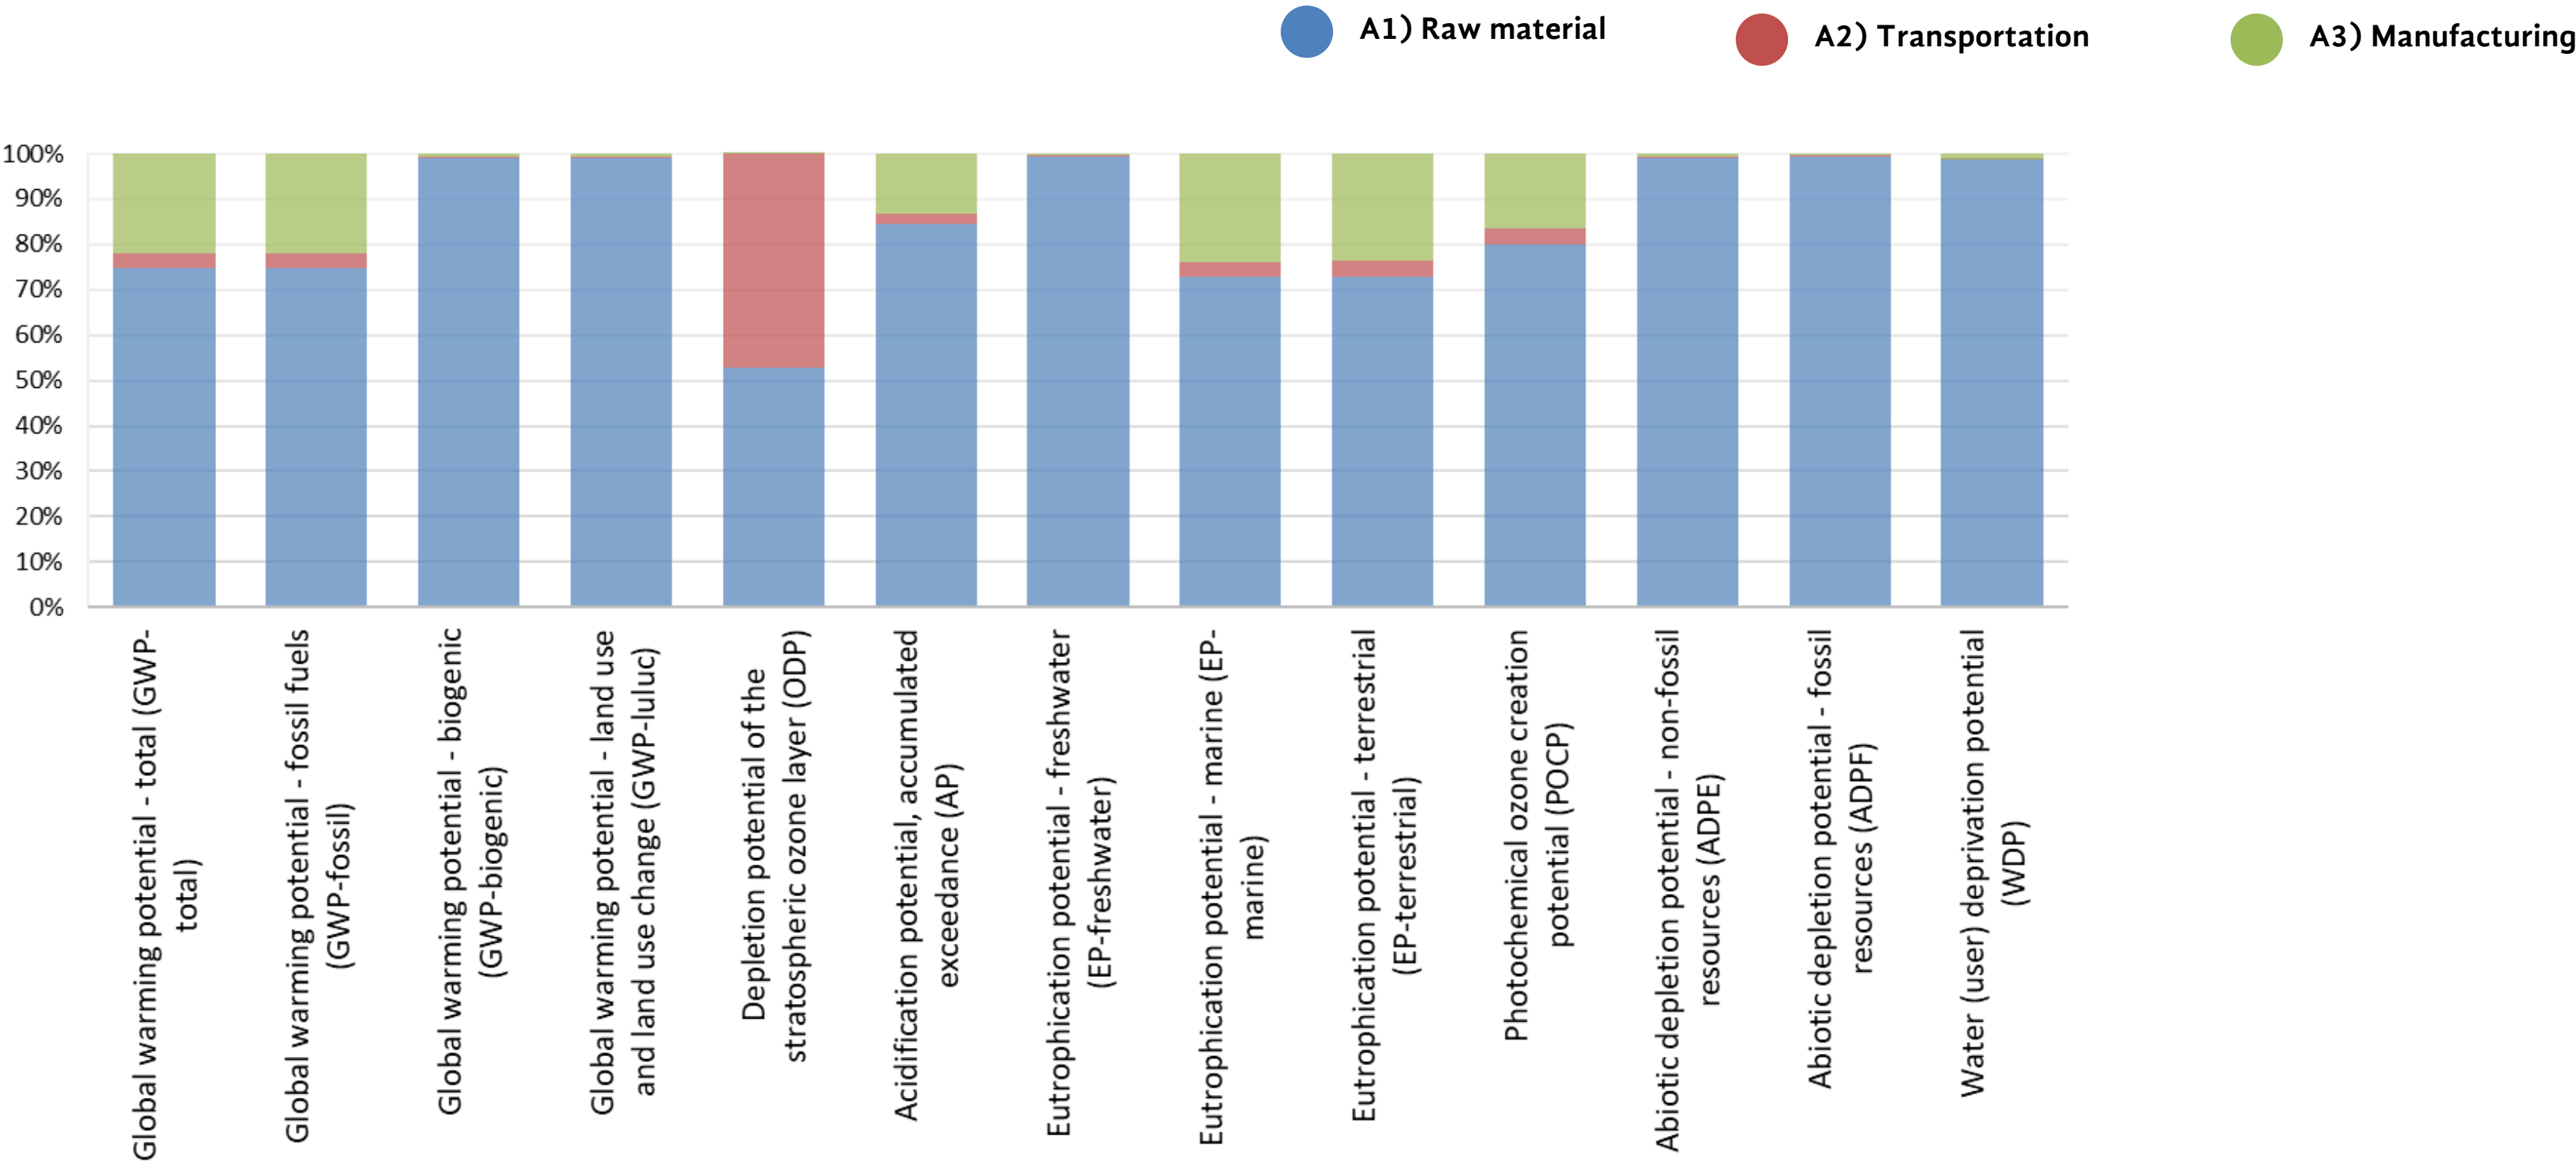


Figure. 2.A1-A3. Basic impact categories results of Commercial long steel hot-rolled.



6. Results of the environmental performance indicators



| Basic impact categories                                             | Unit                              | A1) Raw materials | A2) Transportation | A3) Manufacturing | Total    |
|---------------------------------------------------------------------|-----------------------------------|-------------------|--------------------|-------------------|----------|
| Global warming potential - total (GWP-total)                        | kg CO <sub>2</sub> eq.            | 3.09E+02          | 1.32E+01           | 9.13E+01          | 4.14E+02 |
| Global warming potential - fossil fuels (GWP-fossil)                | kg CO <sub>2</sub> eq.            | 3.09E+02          | 1.32E+01           | 9.13E+01          | 4.13E+02 |
| Global warming potential - biogenic (GWP-biogenic)                  | kg CO <sub>2</sub> eq.            | 1.20E-01          | 4.41E-04           | 7.72E-04          | 1.21E-01 |
| Global warming potential - land use and land use change (GWP-luluc) | kg CO <sub>2</sub> eq.            | 1.47E-01          | 2.84E-04           | 9.75E-04          | 1.49E-01 |
| Depletion potential of the stratospheric ozone layer (ODP)          | kg CFC <sub>11</sub> eq.          | 9.92E-06          | 8.86E-06           | 1.89E-08          | 1.88E-05 |
| Acidification potential, accumulated exceedance (AP)                | mol H+ eq.                        | 1.18E+00          | 3.14E-02           | 1.86E-01          | 1.40E+00 |
| Eutrophication potential - freshwater (EP-freshwater)               | kg P eq.                          | 1.02E-02          | 1.94E-05           | 4.54E-05          | 1.03E-02 |
| Eutrophication potential - marine (EP-marine)                       | kg N eq.                          | 2.84E-01          | 1.31E-02           | 9.34E-02          | 3.90E-01 |
| Eutrophication potential - terrestrial (EP-terrestrial)             | mol N eq.                         | 3.14E+00          | 1.43E-01           | 1.02E+00          | 4.31E+00 |
| Photochemical ozone creation potential (POCP)                       | kg NMVOC eq.                      | 1.23E+00          | 5.07E-02           | 2.55E-01          | 1.53E+00 |
| Abiotic depletion potential - non-fossil resources (ADPE)*          | kg Sb eq.                         | 1.39E-04          | 4.30E-07           | 9.05E-07          | 1.40E-04 |
| Abiotic depletion potential - fossil resources (ADPF)*              | MJ, net calorific value           | 1.86E+03          | 2.70E+00           | 8.35E+00          | 1.87E+03 |
| Water (user) deprivation potential (WDP)*                           | m <sup>3</sup> world eq. deprived | 6.78E+01          | 9.74E-02           | 8.57E-01          | 6.88E+01 |

Table 11. A1-A3. Basic impact categories results of Commercial long steel hot-rolled.

\*Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Disclaimer discouraging:The use of the results of modules A1-A3 without considering the results of module C.

| Basic impact categories                                             | Unit                              | C1) Deconstruction | C2) Waste transport | C3) Waste treatment | C4) Waste disposal | D) Benefits and charges beyond the system boundary |
|---------------------------------------------------------------------|-----------------------------------|--------------------|---------------------|---------------------|--------------------|----------------------------------------------------|
| Global warming potential - total (GWP-total)                        | kg CO <sub>2</sub> eq.            | 3.72E-01           | 1.99E+01            | 0.00E+00            | 5.43E-02           | -9.87E+01                                          |
| Global warming potential - fossil fuels (GWP-fossil)                | kg CO <sub>2</sub> eq.            | 3.72E-01           | 1.99E+01            | 0.00E+00            | 5.43E-02           | -9.87E+01                                          |
| Global warming potential - biogenic (GWP-biogenic)                  | kg CO <sub>2</sub> eq.            | 1.60E-05           | 9.35E-04            | 0.00E+00            | 4.44E-06           | -5.99E-03                                          |
| Global warming potential - land use and land use change (GWP-luluc) | kg CO <sub>2</sub> eq.            | 1.28E-05           | 6.40E-04            | 0.00E+00            | 2.22E-06           | -1.03E-02                                          |
| Depletion potential of the stratospheric ozone layer (ODP)          | kg CFC <sub>11</sub> eq.          | 5.85E-09           | 2.86E-07            | 0.00E+00            | 8.05E-10           | -2.16E-07                                          |
| Acidification potential, accumulated exceedance (AP)                | mol H+ eq.                        | 3.48E-03           | 7.22E-02            | 0.00E+00            | 4.93E-04           | -3.10E-01                                          |
| Eutrophication potential - freshwater (EP-freshwater)               | kg P eq.                          | 3.51E-07           | 4.76E-05            | 0.00E+0             | 1.95E-07           | -3.26E-03                                          |
| Eutrophication potential - marine (EP-marine)                       | kg N eq.                          | 1.63E-03           | 2.94E-02            | 0.00E+00            | 2.24E-04           | -6.28E-02                                          |
| Eutrophication potential - terrestrial (EP-terrestrial)             | mol N eq.                         | 1.79E-02           | 3.22E-01            | 0.00E+00            | 2.46E-03           | -7.33E-01                                          |
| Photochemical ozone creation potential (POCP)                       | kg NMVOC eq.                      | 5.33E-03           | 1.05E-01            | 0.00E+0             | 7.43E-04           | -2.52E-01                                          |
| Abiotic depletion potential - non-fossil resources (ADPE)*          | kg Sb eq.                         | 1.55E-08           | 1.16E-06            | 0.00E+00            | 2.15E-09           | -1.43E-05                                          |
| Abiotic depletion potential - fossil resources (ADPF)*              | MJ, net calorific value           | 5.25E-02           | 6.84E+00            | 0.00E+00            | 3.14E-02           | -7.91E+02                                          |
| Water (user) deprivation potential (WDP)*                           | m <sup>3</sup> world eq. deprived | 3.86E-03           | 2.39E-01            | 0.00E+00            | 6.32E-04           | -6.02E+00                                          |

Table 12.Impact assessment of C1-C4 and D modules.

Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.



# 6. Results of the environmental performance indicators



## 6.1.1. Global Warming Potential (GWP-GHG)

Table 13 shows the result of commercial long steel hot-rolled life cycle (modules A1-A3 and additional scenarios C1-C4 and D) evaluated with the IPCC GWP100 method.

| Impact category                                 | Unit                   | A1-A3    | C1) Deconstruction | C2) Waste transport | C3) Waste treatment | C4) Waste disposal | D) Benefits and charges beyond the system boundary |
|-------------------------------------------------|------------------------|----------|--------------------|---------------------|---------------------|--------------------|----------------------------------------------------|
| Global warming potential (GWP-GHG) <sup>1</sup> | kg CO <sub>2</sub> eq. | 4.14E+02 | 3.72E-01           | 1.99E+01            | 0.00E+00            | 5.43E-02           | -8.91E+01                                          |

<sup>1</sup>This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero.

## 6.2 Use of resources

Table 13.Climate Impact (GWP-GHG) of commercial long steel hot-rolled.

Parameters describing resource use were evaluated with the Cumulated Energy Demand method version 1.09 (Frischknecht et al. 2007) and adjusted with option B of Annex 3 of the PCR 2019:14 Construction products. Version 1.3.4, except for the indicator of use of net fresh water that was evaluated with Recipe 2016 Midpoint (H) version 1.00 (Huijbregts et al. 2017). The detailed description of the use of resources is provided in Table 14 for commercial long steel hot-rolled.

| Indicators describing resource use                                          | Unit                    | A1-A3    | C1) Deconstruction | C2) Waste transport | C3) Waste treatment | C4) Waste disposal | D) Benefits and charges beyond the system boundary |
|-----------------------------------------------------------------------------|-------------------------|----------|--------------------|---------------------|---------------------|--------------------|----------------------------------------------------|
| Use of renewable primary energy as energy carrier (PERE)                    | MJ, net calorific value | 2.78E+02 | 1.10E-02           | 4.30E-01            | 1.32E+02            | 3.31E-03           | -9.31E+01                                          |
| Use of renewable primary energy resources used as raw materials (PERM)      | MJ, net calorific value | 1.34E+02 | 0.00E+00           | 0.00E+00            | -1.32E+02           | 0.00E+00           | 0.00E+00                                           |
| Total use of renewable primary energy (PERT)                                | MJ, net calorific value | 4.13E+02 | 1.10E-02           | 4.30E-01            | 0.00E+00            | 3.31E-03           | -9.31E+01                                          |
| Use of non renewable primary energy as energy carrier (PENRE)               | MJ, net calorific value | 1.32E+03 | 5.48E-02           | 7.17E+00            | 6.24E+02            | 3.30E-02           | -8.30E+02                                          |
| Use of non renewable primary energy resources used as raw materials (PENRM) | MJ, net calorific value | 6.36E+02 | 0.00E+00           | 0.00E+00            | -6.24E+02           | 0.00E+00           | 0.00E+00                                           |
| Total use of non renewable primary energy resource (PENRT)                  | MJ, net calorific value | 1.96E+03 | 5.48E-02           | 7.17E+00            | 0.00E+00            | 3.30E-02           | -8.30E+02                                          |
| Use of secondary material (SM)                                              | kg                      | 8.71E+02 | 0.00E+00           | 0.00E+00            | 0.00E+00            | 0.00E+00           | 0.00E+00                                           |
| Use of renewable secondary fuels (RSF)                                      | MJ, net calorific value | 0.00E+00 | 0.00E+00           | 0.00E+00            | 0.00E+00            | 0.00E+00           | 0.00E+00                                           |
| Use of non-renewable secondary fuels (NRSF)                                 | MJ, net calorific value | 0.00E+00 | 0.00E+00           | 0.00E+00            | 0.00E+00            | 0.00E+00           | 0.00E+00                                           |
| Net use of fresh water (FW)                                                 | m <sup>3</sup>          | 1.91E+00 | 1.53E-04           | 9.87E-03            | 0.00E+00            | 2.41E-05           | -1.58E-01                                          |

Table 14.Use of resources parameters of 1000 kg of commercial long steel hot-rolled.

# 6. Results of the environmental performance indicators



## 6.3 Waste and output flow indicators

Environmental indicators describing waste generation calculated using EDIP 2003 method (Hauschild and Potting, 2005). Environmental parameters describing waste generation are provided below:

| Impact category                        | Unit                       | A1-A3    | C1)<br>Deconstruction | C2) Waste<br>transport | C3) Waste<br>treatment | C4) Waste<br>disposal | D) Benefits and<br>charges beyond the<br>system boundary |
|----------------------------------------|----------------------------|----------|-----------------------|------------------------|------------------------|-----------------------|----------------------------------------------------------|
| Hazardous waste disposed (HWD)**       | kg                         | 6.61E-02 | 3.36E-05              | 1.82E-03               | 0.00E+00               | 4.62E-06              | -1.06E-02                                                |
| Non-hazardous waste disposed (NHWD) ** | kg                         | 6.56E+00 | 1.43E-04              | 1.11E-02               | 0.00E+00               | 2.00E+01              | -6.10E-01                                                |
| Radioactive waste disposed (RWD) ***   | kg                         | 5.13E-03 | 2.50E-07              | 9.32E-06               | 0.00E+00               | 4.27E-08              | -1.34E-04                                                |
| Components for re-use (CRU)            | kg                         | 0.00E+00 | 0.00E+00              | 0.00E+00               | 0.00E+00               | 0.00E+00              | 0.00E+00                                                 |
| Materials for recycling (MFR)*         | kg                         | 2.83E+01 | 0.00E+00              | 0.00E+00               | 9.80E+02               | 0.00E+00              | 9.80E+02                                                 |
| Materials for energy recovery (MER)    | kg                         | 0.00E+00 | 0.00E+00              | 0.00E+00               | 0.00E+00               | 0.00E+00              | 0.00E+00                                                 |
| Exported electrical energy (EEE)       | MJ, net<br>calorific value | 0.00E+00 | 0.00E+00              | 0.00E+00               | 0.00E+00               | 0.00E+00              | 0.00E+00                                                 |
| Exported thermal energy (EET)          | MJ, net<br>calorific value | 0.00E+00 | 0.00E+00              | 0.00E+00               | 0.00E+00               | 0.00E+00              | 0.00E+00                                                 |

Table 15.Other indicators describing waste categories and output of commercial long steel hot-rolled.

Environmental information describing waste categories and output flows is calculated using the EDIP 2003 method (Hauschild and Potting, 2005).  
The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins, and/or risks.  
\*Direct indicators from Gerdau Corsa process data  
\*\*Indirect indicators are not related to Gerdau Corsa operations but to the generation during the processes of obtaining auxiliary inputs.  
\*\*\*No radioactive waste is produced during Gerdau Corsa operation.



## 7. Additional environmental information

The company has the following certifications:



### Environment

Gerdau Corsa seeks to balance our economic, environmental, and social commitments. Each day, our team members make steel products almost entirely composed of recycled content. That's one way in which we reduce our environmental footprint.

### Recycling

Steel is an endlessly recyclable material. Each year, Gerdau Corsa transforms about 1 million tons of recycled scrap into steel products. Most of the scrap comes from discarded materials. Producing steel from scrap metal reduces the amount of material deposited in landfills. The use of steel scrap as a raw material reduces energy consumption in our production process and minimizes emissions of CO<sub>2</sub>.

## 8. Version history

The previous version of this EPD named commercial long steel hot-rolled manufactured from steel scrap was published on July 29, 2020, in accordance with PCR 2012:01 Construction products and construction services, Version 2.3 (2018-11-15).

This EPD was updated following EN 15804:2012+A2:2019/AC:2021 standard and Construction products PCR 2019:2014 V 1.3.4.

9. Contact information

10. References

| EPD OWNER                                                                                                                                              | LCA author                                                                                                              | PROGRAMME OPERATOR                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <p>rigoberto.torres@gerdau.com<br/>www.gerdaucorsa.com.mx</p> <p></p> | <p>jpchargoy@centroacv.mx</p> <p></p> | <p>info@environdec.com</p> <p></p> |

- ALACERO. (2022). asociación Latinoamericana del Acero (ALACERO) El acero es el único material que puede ser reciclado ilimitadamente al 100%. Obtained from <https://www.alacero.org/noticias/el-acero-es-el-unico-material-que-puede-ser-reciclado-ilimitadamente-al-100>.
- BIEE. (2023). Base de Indicadores de Eficiencia Energética de México. Obtained from <https://www.biee-conuee.net/site/index.php>
- European Committee for Standardization. (2019). Sustainability of construction works — Environmental product declarations — Core rules for the product category of construction products (EN 15804:2012+A2:2019). CEN.
- Frischknecht Rolf. (2007). Implementation of Life Cycle Impact Assessment Methods. Ecoinvent report No. 3.
- Huijbregts, M. A., Steinmann, Z. J., Elshout, P. M., Stam, G., Verones, F., Vieira, M. D., . . . van Zelm, R. (2017). ReCiPe 2016 v1.1. A harmonized life cycle impact assessment method at midpoint and endpoint level Report I: Characterization. Bilthoven, The Netherlands: National Institute for Public Health and the Environment.
- IMNC. (2008). NMX-SAA-14040-IMNC Gestión ambiental - Análisis de ciclo de vida - Principios y marco de referencia. México, D.F.: IMNC.
- ISO 14020. (2000). Environmental Labels and Declarations — General Principles
- ISO 14025. (2006). Type III Environmental Declarations.
- ISO 14044. (2006). Environmental management - Life cycle assessment - Requirements and guidelines. Suiza: International Organization for Standarization.
- PCR 2019:14 Construction Products V 1.3.4. (30 de 04 de 2024). EPD System. Obtained from <https://www.environdec.com/>
- PRé Consultants. (2010). Data base manual. Methods library. Retrieved abril 20, 2010, from <http://www.pre.nl/download/manuals/DatabaseManualMethods.pdf>PRé Sustainability. (2021). SimaPro database manual. Methods library.
- The International EPD System. (2024). General Programme Instructions for The International EPD System. Version 5.0.0 Publied on 2024-06-19.
- Zaragoza, D., & Dominguez, E. (2025). Life cycle assessment of commercial steel profiles – angle LI, channel ce, square, round os, hexagonal, and flat bars manufactured from scrap steel. Center for Life Cycle Assessment and Sustainable Design – CADIS.